MIL-S-20708/74D 30 July 1987

SUPERSEDING MIL-S-20708/74C 19 December 1968

MILITARY SPECIFICATION SHEET SYNCHRO, TORQUE RECEIVER TRANSMITTER, TYPE 37TRX6A

This specification is approved for use by all Departments and Agencies of the Department of Defense. The requirements for acquiring the Synchros described herein shall consist of this specification and the latest issue of MIL—S—20708.

TABLE I. Requirements.

Requirement	Value	Unit	Tolerance
Frequency	60	Hz	±1%
Primary Voltage	115	volts	±1%
Primary Current	830	milliamps	maximum
Primary Power Impedance:	9.25	watts	maximum
Zss Impedance Angle:	7.0-10.0	ohms	minmax.
Žss	30.0-40.0	degrees	minmax.
Transformation Ratio	0.783	_	±2%
Phase Shift (Lead) Electrical Error	3.5	degrees	maximum
Receiver Error	10	minutes	maximum
Null Voltage:	36	minutes	maximum
Total	170	millivolts	maximum
Fundamental	35	millivolts	maximum
Synchronizing Time:			iii daanii diiii
30° ±2°	1.0	seconds	maximum
Synchronizing Time:			
177° ±2°	2.0	seconds	maximum
Torque Gradient	0.9	ounce-inches	minimum
		per degree	
Radial Play	0.0008	inches	maximum
End Play	0.0030	inches	±0.0020
Temperature Rise	35	degrees (C)	maximum
Variation of Voltage			
(+10%) and Freq. (-5%)	18	watts	maximum

This unit shall not be subjected to the altitude requirements of MIL-S-20708.

AMSC - N/A

MIL-S-20708/74D

TABLE II. Military part number variant characteristics.

Military	A	B	G	Shaft	Terminal	+.0000
Part No. <u>1</u> /	±.010	±.010	Maximum	Style	End	
M20708/74-01A	.700	.730	4.030	Splined	Terminal Board	.2405

- 1/Military part number M20708/74-01A shall be the NATO standard.
- 1/The suffix letter following the numerical dash number corresponds to the latest modification letter in the type designation.

TABLE III. Military part number cross-references.

SUPERSEDED MILITA	SUPERSEDED MILITARY PART NUMBERS			
MIL-S-20708/74C	MIL-S-20708/74B M20708/74-001			
M20708/74C-001	M20/08/74-001			

NOTE: All line items shown in Table III refer to equivalent and interchangeable synchros of the same type designation modification. Part number changes do not affect form, fit, or function of the synchros listed therein.

Custodians:

Army-AR

Navy-AS Air Force-85 Preparing Activity:

Navy-AS

(Project 5990-0334-58)

Review Activities:

Army-MI,AV

Navy-OS Air Force-11,17,99

DLA-ES


User Activities:


Navy-MC,CG

MILITARY SPECIFICATION SHEET SYNCHRO TORQUE RECEIVER TRANSMITTER, TYPE 37TRX6a

This Specification is Mandatory for Use by all Departments and Agencies of the Department of Defense.

THE COMPLETE REQUIREMENTS FOR PROCURING THE SYNCHRO DESCRIBED HEREIN SHALL CONSIST OF THIS DOCUMENT AND THE ISSUE IN EFFECT OF SPECIFICATION MIL-S-20708.

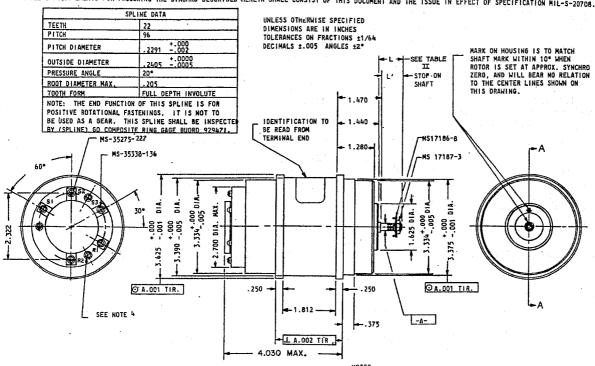

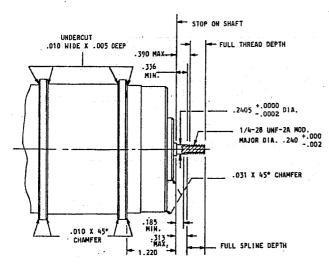

PARTIAL SECTION

- 1. PERPENDICULARITY AND CONCENTRICITY SHALL BE MEASURED WITH THE UNIT IN A VERTICAL POSITION SUPPORTED BY THE SHAFT, THEN THE HOUSING ROTATED.
- 2. RUNOUT OF FEATURE "A" (SMOOTH PORTION) OF SHAFT SHALL NOT EXCEED .0008 TIR.
- 3. END PLAY AND RADIAL PLAY SHALL BE MEASURED DURING THE REVERSAL OF THE FOLLOWING LOADS:
 - END PLAY 1 POUND RADIAL PLAY 1 POUND
- 4. THE TERMINAL BLOCK SHALL BE SECURED BY SCREWS OTHER THAN THE TERMINAL SCREWS. RECESSES SHALL ALLOW TERMINAL LUGS MS-25046-6 TO BE INSTALLED WITH THE BARRELS INBOARD OR OUTBOARD, AND PREVENT THE LUGS FROM TURNING.
- 5. MINOR VARIATIONS OF UNIT CONFIGURATION ARE PERMITTED FOR UNDIMENSIONED DESIGN DETAIL.
- 6. THE FOLLOWING LIST OF HARDWARE, MS-35275-227 MACHINE SCREW (5 REQUIRED), MS-35338-136 LOCK WASHER (5 REQUIRED), MS-17186-8 DRIVE WASHER (1 REQUIRED) MS-17187-3 NUT (1 REQUIRED), SHALL BE PACKAGED IN A VENTILATED ENVELOPE MADE OF MATERIAL HAVING A PH VALUE OF 6-8 THAT IS COMPATIBLE WITH THE WEIGHT OF THE CONTENTS, THEN THE PACKAGED HARDWARE SHALL BE PLACED IN THE UNIT SYNCHRO PACKAGE. FOR INFORMATION ONLY, SEE SYNCHRO CLAMP MS-17183.
- 7. PENDING ISSUANCE OF A QUALIFIED PRODUCTS LIST (OPL) A SAMPLE OF THE SYNCHROS TO BE FURNISHED UNDER THIS SPECIFICATION SHALL BE SUBJECTED TO THE PREPRODUCTION TESTS AS SPECIFIED IN MIL-5-20708.

FSC 5990 SHEET 1 OF 2

TABLE I

	and the second s			
	Requirement	Value 60	<u>Unit</u> Hz	Tolerance
	Frequency			+1%
	Primary Voltage	115	volts	+1%
	Primary Current	830	milliamps	maximum
	Primary Power	9.25	watts	maximum
	Impedance:			
	Zss	8.0-10.0	ohms	minmax.
	Impedance Angle:			
	Zss	31.0-35.0	degrees	minmax.
	Transformation Ratio	0.783		+2%
	Phase Shift	3.0(lead)	degrees	maximum
	Receiver Error	36.0	minutes	maximum
	Electrical Error	10.0	minutes	maximum
•	Null Voltage:	1010	mina ccs	MOA HAGIA
		170	millivolts	maximum
	Fundamental	35.0	millivolts	maximum
	Synchronizing Time 30° +2°	1.0		
	Synchronizing Time 177° +2°	2.0	seconds	maximum
			seconds	maximum
	Torque Gradient	0.90	ounce-inches	minimum
	Dadial Dlaw	0.0000	per degree	
	Radial Play	0.0008	inches	maximum
	End Play	0.0030	inches	+0.0020
	Temperature Pise	35.0	degrees(C)	maximum
	Variation of Voltage			
	(+10%) and Freq. (-5%)	13.5	watts	maximum -

This unit shall not be subjected to the altitude requirements of MIL-S-20708.

Part number: M20708/74C plus applicable dash number from Table II.

TABLE II

DASH NO.	SHAFT DIAMETER	SHAFT STYLE	TERMINAL END	L' DIMENSION TO STOP ON SHAFT	L REFERENCE FREE SHAFT LENGTH
* -001	.2405	Splined	Terminal Board	.700 ± .010	.730 ± .010

*Dash number -001 shall be the NATO Standard.

Custodians: Army-MU Navy-AS Air Force-85 Review Activities:

Army-EL,MI,MO,AV,MU Navy-SH,OS,AS Air Force-11,17,85 DSA-ES

User Activities: Navy-SH,OS,AS,MC,CG

Preparing Activity: Navy-AS

Project No. 5990-0243

MILITARY SPECIFICATION SHEET

SYNCHRO, TORQUE RECEIVER TRANSMITTER, TYPE 37TRX6A

This amendment forms a part of Military Specification Sheet MIL-S-20708/74C dated 19 December 1968, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 2

Table I - Make the following deletions and substitutions for the requirement values indicated below:

		Value			
##	Requirement	<u>Delete</u>	Substitute	<u>Unit</u>	Tolerance
	Impedance Zss	8.0 - 10.0	7.0 - 10.0	Ohms	MinMax.
	Impedance Angle Zss	31.0 - 35.0	30.0 - 40.0	Degrees	MinMax.
	Phase Shift	3.0 (lead)	3.5 (lead)	Degrees	Maximum
	Variation of Voltage (+10%) and Freq. (-5%)	13.5	18.0	Watts	Maximum "

Table II and notes above and below Table II - Delete entirely and substitute the following:

TABLE II. Military Part Number Variant Characteristics

MILITARY PART NO. <u>1</u> /	SHAFT DIAMETER NOMINAL	SHAFT STYLE	TERMINATIONS	L' DIMENSION TO STOP ON SHAFT	L DIMENSION FREE SHAFT LENGTH
M20708/74-01A	.2405	Splined	Terminal Board	.700 <u>+</u> .010	.730 <u>+</u> .010

 $[\]underline{1}$ / Military part number M20708/74-01A shall be the NATO Standard.

FSC 5990

^{1/} The suffix letter following the numerical dash number corresponds to the latest modification letter in the type designation."

MIL-S-20708/74C AMENDMENT 1

Add a new Table III and note as follows:

TABLE III. Military Part Number Cross-References

SUPERSEDED MILITARY PART NUMBERS		NEW MILITARY PART NUMBERS
MIL-S-20708/74C	MIL-S-20708/74B	
M20708/74C-001	м20708/74-001	M20708/74-01A

NOTE: All line items shown in Table III refer to equivalent and interchangeable synchros of the same type designation modification. Part number changes do not affect form, fit, or function of the synchros listed therein."

Custodians:

Army - AR

Navy - AS

Air Force - 85

Review activities:

Army - ME

Navy - OS, SH, EC

Air Force - 11, 17, 19, 99

DSA - ES

User activities:

Army -

Navy - MC, CG

Air Force -

Preparing activity:

Navy - AS

Project No. 5990-0313-39

SPECIFICATION ANA	LYSIS SHEET		Form Ap Budget Bureau	proved
This sheet is to be filled out by p ification in procurement of products for u taining information on the use of this spec minimum amount of delay and at the least lines on reverse side, staple in corner, as SPECIFICATION	INSTRUCTIONS ersonnel either Governmer ltimate use by the Depart ification which will insu cost. Comments and the r	t or contr ment of De re that su eturn of t	actor, involved in the fense. This sheet in itable products can his form will be app	e use of the sprovided for be procured with recisted. Foldar
SPECIFICATION MIL-S-20708/74C	nd send to preparing acti	vity fee is	ndicated on reverse	tercof).
REGANIZATION (Of submitter)		CITY AN	D STATE	
			DSINIE	
ONTRACT NO.	QUANTITY OF ITEMS PROCU	RED	DOLLAR AMOUNT	
ATERIAL PROCURED UNDER A			\$	
DIRECT GOVERNMENT CONTRACT	SUBCONTRACT			
. HAS ANY PART OF THE SPECIFICATION CR A. GIVE PARAGRAPH NUMBER AND WORDIN	EATED PROBLEMS OR RECH	IRED INTER	PRETATION IN PROCL	REMENT USE?
•				
	•			
B. RECOMMENDATIONS FOR CORRECTING T	HE DEFICIENCIES.			
				• •
•				
	•			
		•	, * *	
·	•			
• .				
COMMENTS ON ANY SPECIFICATION REQUIRE	MENT CONSIDERED TOO RI	ĞID		Y
	•			•
IS THE SPECIFICATION RESTRICTIVE?				
YES ON IF "YES", IN WH	AT WAY?			
	•			
REMARKS (Attach any pertinent data which	may be of use in improvi	ng this on	ecification. If the	re ere -11:
tional papers, attack to form and place b	oth in an envelope addre	sed to pre	paring activity)	. + 41.2 0001.
MITTED BY (Printed or typed name and a	ctivity)		DATE	

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

DSTAGE AND FEFS PAID NAVY DEPARTMENT

OFFICIAL BUSINESS

Weapons Engineering Standardization Office (Code X) Naval Air Engineering Center Philadelphia, Pennsylvania 19112

FOLD

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-515/A-3704