



HW24-108

IP65 Rated, NEMA 24 High Torque Step Motor

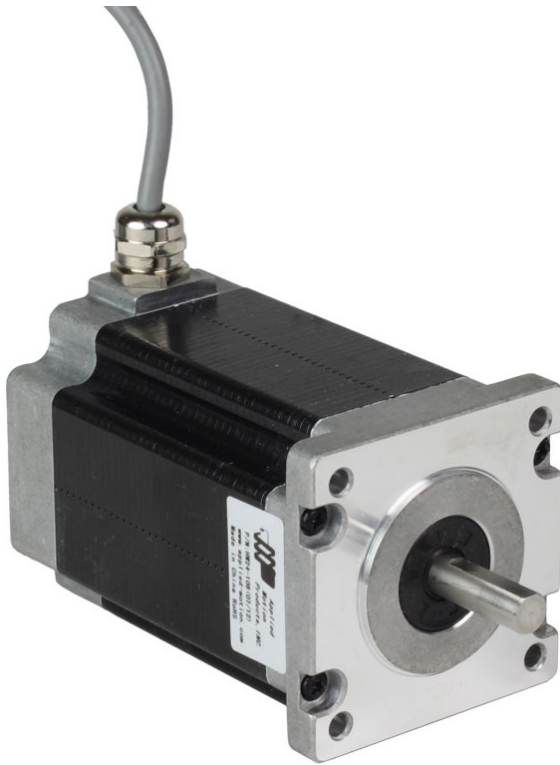

Product Features

- 2-phase hybrid step motor
- Rated IP65 for wet and dusty environments
- High torque design
- NEMA 24 dimensions
- Integral 10 ft shielded cable w/ cable gland
- Sealed laminations
- Front shaft seal
- Single shaft version standard
- Double shaft version with encoder available

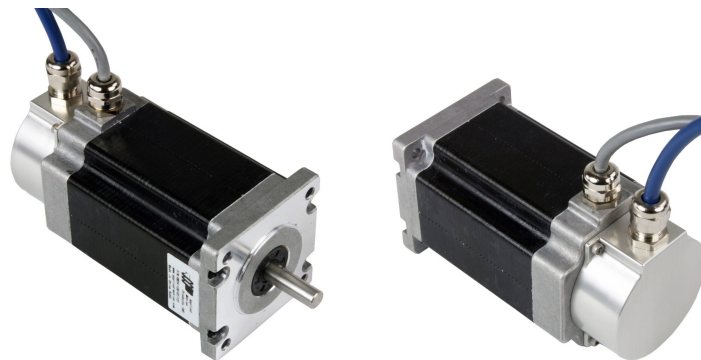

Description

The HW24-108 two-phase stepper motor is suitable for a wide range of motion control applications including wet factory environments and outdoor use. The IP65 rating means the motor is dust proof and resistant to lower pressure water jets. Key features of this rating include an integral 10 ft shielded cable, a nickel plated brass cable gland, sealed laminations and a front shaft contact seal. This motor also has an internal corrosion-resistant film coating, further protecting it in wet and humid environments.

A double-shaft version with encoder is available, part number HW24-108D-ZAC.







IP65 specifies a product that is dust tight (no ingress of dust; complete protection against contact) and protected against water jets (water projected by a nozzle from any direction shall have no harmful effects). To see our motor design operating in a rain simulation chamber check out this [video](#).

Specifications

Part Number	HW24-108
Frame Size	NEMA 24
Motor Type	High torque
Part Number w/Double Shaft	NA
Part Number w/Encoder	HW24-108D-ZAC
Motor Length	3.72 inches
Number of Lead Wires	4
Lead Wire Configuration	shielded cable, no connector
Lead Wire/Cable Length	10 ft
Lead Wire Gauge	22 AWG
Unipolar Holding Torque	NA
Bipolar Holding Torque	354 oz-in
Step Angle	1.8 deg
Bipolar Series Current	NA
Bipolar Series Resistance	NA
Bipolar Series Inductance	NA
Bipolar Parallel Current	4.0 A/phase
Bipolar Parallel Resistance	1.1 Ohms/phase
Bipolar Parallel Inductance	2.1 mH/phase
Unipolar Current	NA
Unipolar Resistance	NA
Unipolar Inductance	NA
Rotor Inertia	1.27E-02 oz-in-sec ²
Integral Gearhead	No
Weight	3.0 lbs
Storage Temperature	-30 to 70 °C
Operating Temperature	-20 to 50 °C
Insulation Class	Class B (130 °C)
Maximum Radial Load	NA
Maximum Thrust Load	NA
Shaft Run Out	0.0012 inch T.I.R. max

Radial Play	0.0008 inch max w/ 1.1 lb load
End Play	0.003 inch max w/ 1.1 lb load
Perpendicularity	0.004 inches
Concentricity	0.002 inches

Downloads

Datasheet	 StepMotorWiring-4-lead-cabled.pdf
2D Drawing	 HW24-108D-ZAC_RevC.pdf  HW24-108_RevD.pdf
3D Drawing	 HW24-108.igs  HW24-108D-ZAC.igs
Speed-Torque Curves	 StepMtrAppData_HW24-108_RevA.pdf
Agency Approvals	There are no related agency approval documents at this time.
Application Notes	There are currently no Application Notes available for this product.