

# Model SA36H Single Turn Absolute



## Features

- Standard Size 36 mm Package (1.42")
- Durable Magnetic Technology
- Up to 14 Bits of Single Turn Resolution
- SSI and CANopen Communications
- Flex Mount Eliminates Couplings and is Ideal for Motors or Shafts

The Model SA36H Single Turn Absolute Accu-Coder™ is ideal for a wide variety of industrial applications that require an encoder with the capability of absolute positioning output. Its fully digital output, rugged magnetic technology and high sealing make the Model SA36H an excellent choice for all applications, especially ones with a high presence of noise. Available with a 1/4" or 6 mm hollow bore and a wide selection of flexible mounting options, the Model SA36H is easily designed into a variety of applications.


## Common Applications

Robotics, Telescopes, Antennas, Medical Scanners, Windmills, Elevators, Lifts, Motors, Automatic Guided Vehicles, Rotary and X/Y Positioning Tables

## Model SA36H Ordering Guide

For Multiturn applications see Model MA36H

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

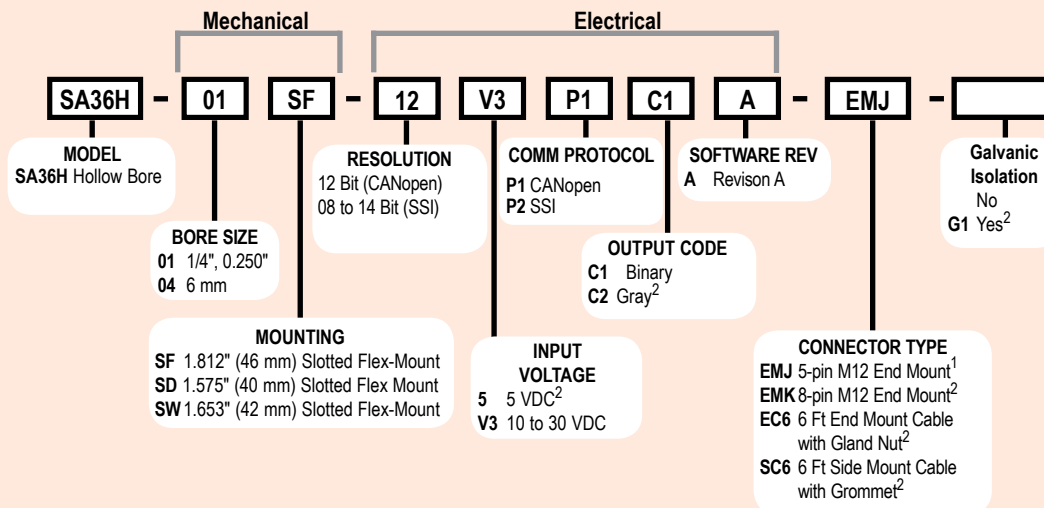

For specification assistance call  
Customer Service at  
1-800-366-5412

### Notes:

- 1 Available with CANopen only
- 2 Available with SSI only

# Model SA36H Single Turn Absolute

## Model SA36H Specifications

### Electrical

Input Voltage..... 10 to 30 VDC max SSI or CAN  
 5 VDC SSI Only  
 Input Current..... 50 mA max with no external load  
 Power Consumption..... 0.5 W max  
 Resolution..... 12 bit (CAN)  
 8 to 14 bit (SSI)  
 Accuracy..... Less than .15° (CANopen)  
 Less than .35° (SSI)

### CANopen Interface

Protocol..... CANopen:  
 - Communication profile CiA 301  
 - Device profile for encoder CiA 406  
 V3.2 class C2  
 Node Number..... 0 to 127 (default 127)  
 Baud Rate..... 10 Kbaud to 1 Mbaud with automatic bit rate detection

The standard settings as well as any customization in the software can be changed via LSS (CiA 305) and the SDO protocol, e.g. PDOs, scaling, heartbeat, node-ID, baud rate, etc

### Programmable CAN Transmission Modes

Synchronous..... When a synchronisation telegram (SYNC) is received from another bus node, PDOs are transmitted independently  
 Asynchronous..... A PDO message is triggered by an internal event (e.g. change of measured value, internal timer, etc.)

### SSI Interface

Clock Input..... via opto coupler  
 Clock Frequency... 100KHz to 500KHz  
 Data Output..... RS485 / RS422 compatible  
 Output Code..... Gray or binary  
 SSI Output..... Angular position value  
 Parity Bit..... Optional (even/odd)  
 Error Bit..... Optional  
 Turn On Time..... <1.5 sec  
 Pos. Counting Dir.. Connect DIR to GND for CW  
 Connect DIR to VDC for CCW  
 (when viewed from shaft end)  
 Set to Zero..... Apply VDC for 2 sec


### Mechanical

Max Shaft Speed..... 12,000 RPM  
 Bore Size..... 6 mm, .250"  
 Bore Depth..... 17 mm (.669")  
 User Shaft  
 Radial Runout..... 0.005" max  
 Starting Torque..... <0.45 oz-in typical  
 Housing..... Ferrous chrome-plated magnetic screening  
 Mounting..... Hollow shaft with flex mount  
 Weight..... 5 oz typical

### Environmental


Operating Temp..... -40° to +80° C  
 Storage Temp..... -40° to +100° C  
 Humidity..... 95% RH non-condensing  
 Vibration..... 5 g @ 10 to 2000 Hz  
 Shock..... 100 g @ 6 ms duration  
 Sealing..... IP67, shaft sealed to IP65

## Model SA36H 1.812" (46 mm) Slotted Flex Mount (SF)

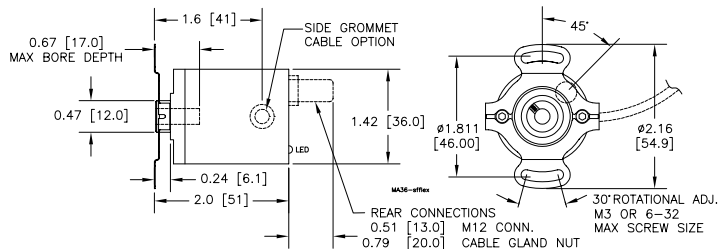


## Model SA36H Optional Flex Mounts

### 1.575" (40 mm): SD

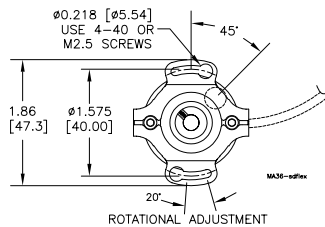


### 1.653" (42 mm): SW

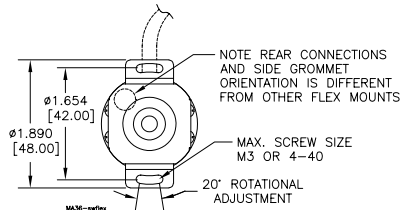

### Wiring Table

#### CANopen Encoders

Function	Pin
+VDC	2
Ground (GND)	3
CAN <sub>High</sub>	4
CAN <sub>Low</sub>	5
CAN <sub>GND</sub> / shield	1



#### SSI Encoders

Function	8-pin M12	Cable
Ground (GND)	1	White
+VDC	2	Brown
SSI CLK+	3	Green
SSI CLK-	4	Yellow
SSI DATA+	5	Gray
SSI DATA-	6	Pink
PRESET	7	Blue
DIR	8	Red
Shield	housing	Side Exit - Housing End Exit - N/C

