

# Model MA36S Multiturn Absolute



## Features

- Standard Size 36 mm Package (1.42")
- Durable Magnetic Technology
- Multiturn Absolute Encoder (12 Bit/40 Bit)
- SSI and CANopen Communications
- Proven New Turns Counting Technology - No Gears or Batteries

The Model MA36S Multiturn Absolute Accu-Coder™ is ideal for a wide variety of industrial applications that require an encoder with the capability of absolute positioning output. Its fully digital output and innovative use of battery-free multiturn technology make the Model MA36S an excellent choice for all applications, especially ones with a high presence of noise. Its durable magnetic technology and high sealing make it a perfect choice for dirty industrial environments. Available with a 6 mm or 1/4" shaft and a servo mount, the Model MA36S is easily designed into a variety of applications.


## Common Applications

Robotics, Telescopes, Antennas, Medical Scanners, Windmills, Elevators, Lifts, Motors, Automatic Guided Vehicles, Rotary and X/Y Positioning Tables

## Model MA36S Ordering Guide

For Single Turn applications see Model SA36S

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details.

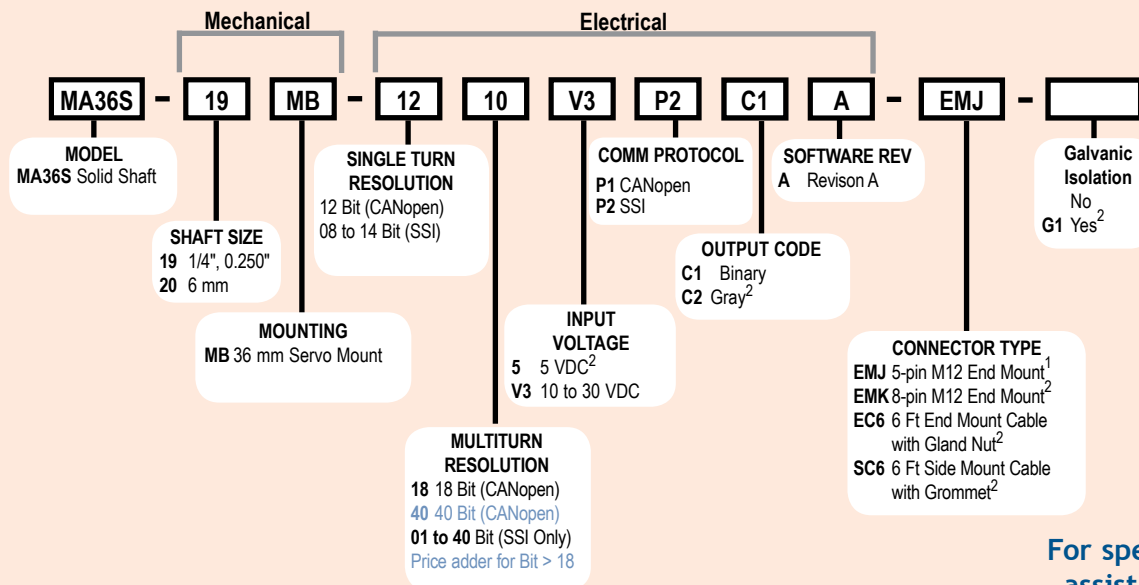

For specification assistance call  
Customer Service at  
1-800-366-5412

### Notes:

- 1 Available with CANopen only
- 2 Available with SSI only

# Model MA36S Multiturn Absolute

## Model MA36S Specifications

### Electrical

Input Voltage ..... 10 to 30 VDC max SSI or CAN  
 5 VDC SSI Only  
 Input Current ..... 50 mA max with no external load  
 Power Consumption 0.5 W max  
 Resolution (Single) ... 12 bit (CAN)  
 8 to 14 bit (SSI)  
 Resolution (Multi) ... Up to 40 bit multiturn (CANopen or SSI)  
 Accuracy ..... Less than .15° (CANopen)  
 Less than .35° (SSI)

### CANopen Interface

Protocol ..... CANopen:  
 - Communication profile CiA 301  
 - Device profile for encoder CiA 406  
 V3.2 class C2  
 Node Number ..... 0 to 127 (default 127)  
 Baud Rate ..... 10 Kbaud to 1 Mbaud with automatic bit rate detection

The standard settings as well as any customization in the software can be changed via LSS (CiA 305) and the SDO protocol, e.g. PDOs, scaling, heartbeat, node-ID, baud rate, etc

### Programmable CAN Transmission Modes

Synchronous ..... When a synchronisation telegram (SYNC) is received from another bus node, PDOs are transmitted independently  
 Asynchronous ..... A PDO message is triggered by an internal event (e.g. change of measured value, internal timer, etc.)

### SSI Interface

Clock Input ..... via opto coupler  
 Clock Frequency ... 100KHz to 500KHz  
 Data Output ..... RS485 / RS422 compatible  
 Output Code ..... Gray or binary  
 SSI Output ..... Angular position value  
 Parity Bit ..... Optional (even/odd)  
 Error Bit ..... Optional  
 Turn On Time ..... <1.5 sec  
 Pos. Counting Dir. Connect DIR to GND for CW  
 Connect DIR to VDC for CCW  
 (when viewed from shaft end)  
 Set to Zero ..... Apply VDC for 2 sec


### Mechanical

Max Shaft Speed ..... 12,000 RPM  
 Shaft Size ..... 6 mm, 0.250"  
 Radial Shaft Load ..... 7 lb (32 N) = bearing life 1.10<sup>10</sup> revs  
 3.6 lb (16 N) = bearing life 1.10<sup>11</sup> revs  
 Axial Shaft Load ..... 5 lb (20 N) = bearing life 1.10<sup>10</sup> revs  
 2.3 lb (10 N) = bearing life 1.10<sup>11</sup> revs  
 Starting Torque ..... <0.45 oz-in typical  
 Housing ..... Ferrous chrome-plated magnetic screening  
 Mounting ..... Flange or servo type  
 Weight ..... 5 oz typical

### Environmental

Operating Temp ..... -40° to +80° C  
 Storage Temp ..... -40° to +100° C  
 Humidity ..... 95% RH non-condensing  
 Vibration ..... 5 g @ 10 to 2000 Hz  
 Shock ..... 100 g @ 6 ms duration  
 Sealing ..... IP67, shaft sealed to IP65

## Model MA36S Solid Shaft

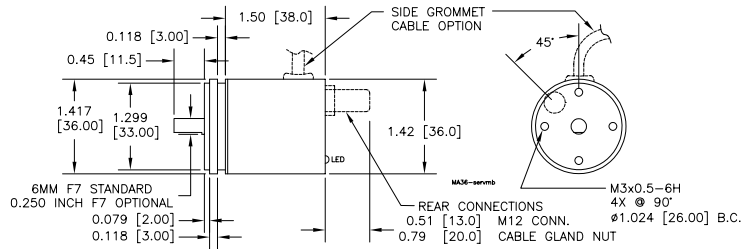

## Wiring Table

### CANopen Encoders

Function	Pin
+VDC	2
Ground (GND)	3
CAN <sub>High</sub>	4
CAN <sub>Low</sub>	5
CAN <sub>GND</sub> / shield	1

### SSI Encoders

	8-pin M12	Cable
Function		
Ground (GND)	1	White
+VDC	2	Brown
SSI CLK+	3	Green
SSI CLK-	4	Yellow
SSI DATA+	5	Gray
SSI DATA-	6	Pink
PRESET	7	Blue
DIR	8	Red
Shield	housing	Side Exit - Housing End Exit - N/C